


## Installation:

The installation of the control box and the fixing of cables to the switch key will be done by competent HUFCOR - Installers at the time of the track installation. The wall jamb will be delivered and installed together with the panels. (Standard)

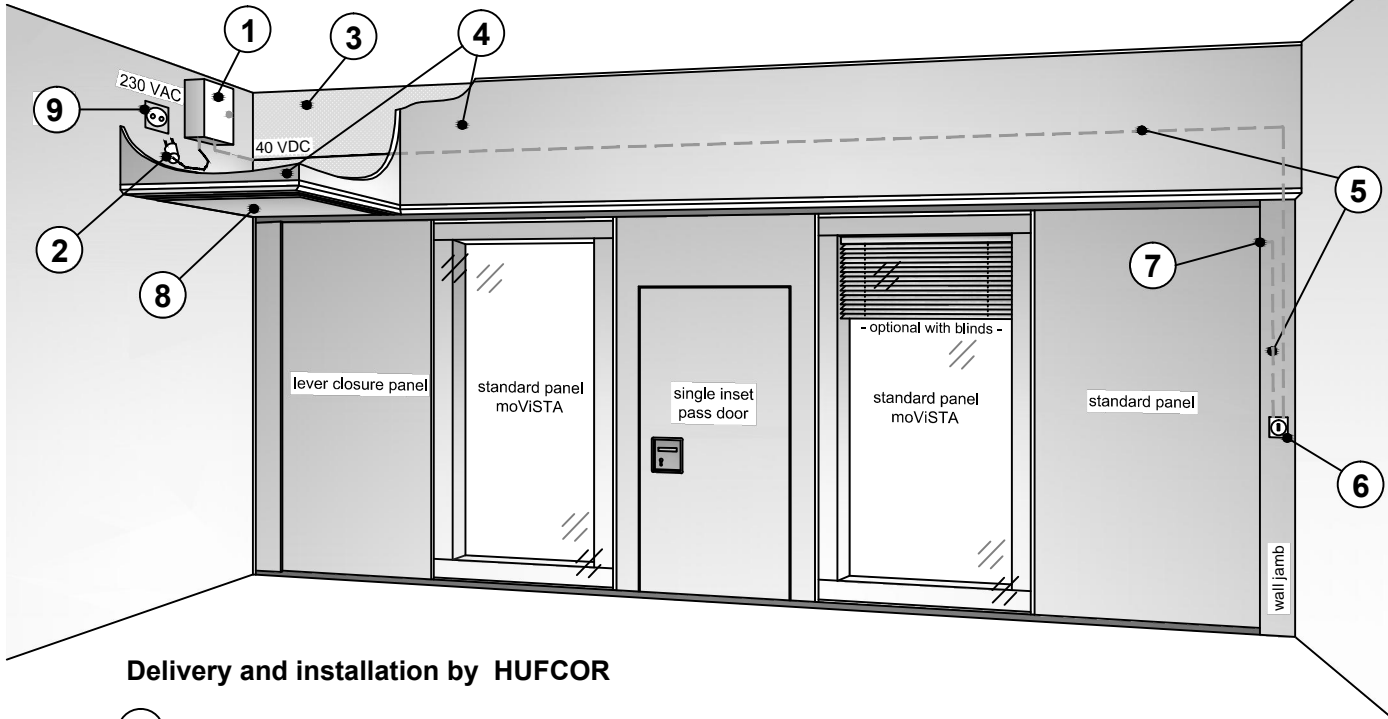

## Delivery and installation by HUFCOR

- |  |  |
|--|--|
| <p><b>1</b> control box incl. power supply and battery supply, optional with receiver for blinds control (width x height x depth) 200 x 300 x 155 mm</p> <p><b>2</b> cable incl. power connector (IEC 60884-01) is already assembled in the control box, length: ca. 2 m</p> <p><b>3</b> acoustic bulkheading of the track system</p> <p><b>4</b> track covering (example)</p> | <p><b>5</b> cable 3 x 1,5 mm<sup>2</sup> fixed on acoustic bulkheading</p> <p><b>6</b> key switch fixed in the wall jamb</p> <p><b>7</b> contact between panel / wall jamb</p> <p><b>8</b> track covering - used as access for maintenance (example)</p> |
|--|--|

## installations by customer/user

- 9** socket, 230 VAC, 6 A max. 2 m off control box, e.g. above parking track, between track covering

## Information:

If the position of the control box is changed, make sure there is sufficient access of 600 x 600 mm for maintenance.

Furthermore, the control box can be fixed in another room or directly on the wall.